



Contents

Stone

Canterbury Stone 4

Prescott Stone 6

Brick

Chelsea Matte Brick 10

Kensington Brick 12


Oxford Brick 14

Split Rock Brick 16

Block


Standard Block 18

Architectural Block 25

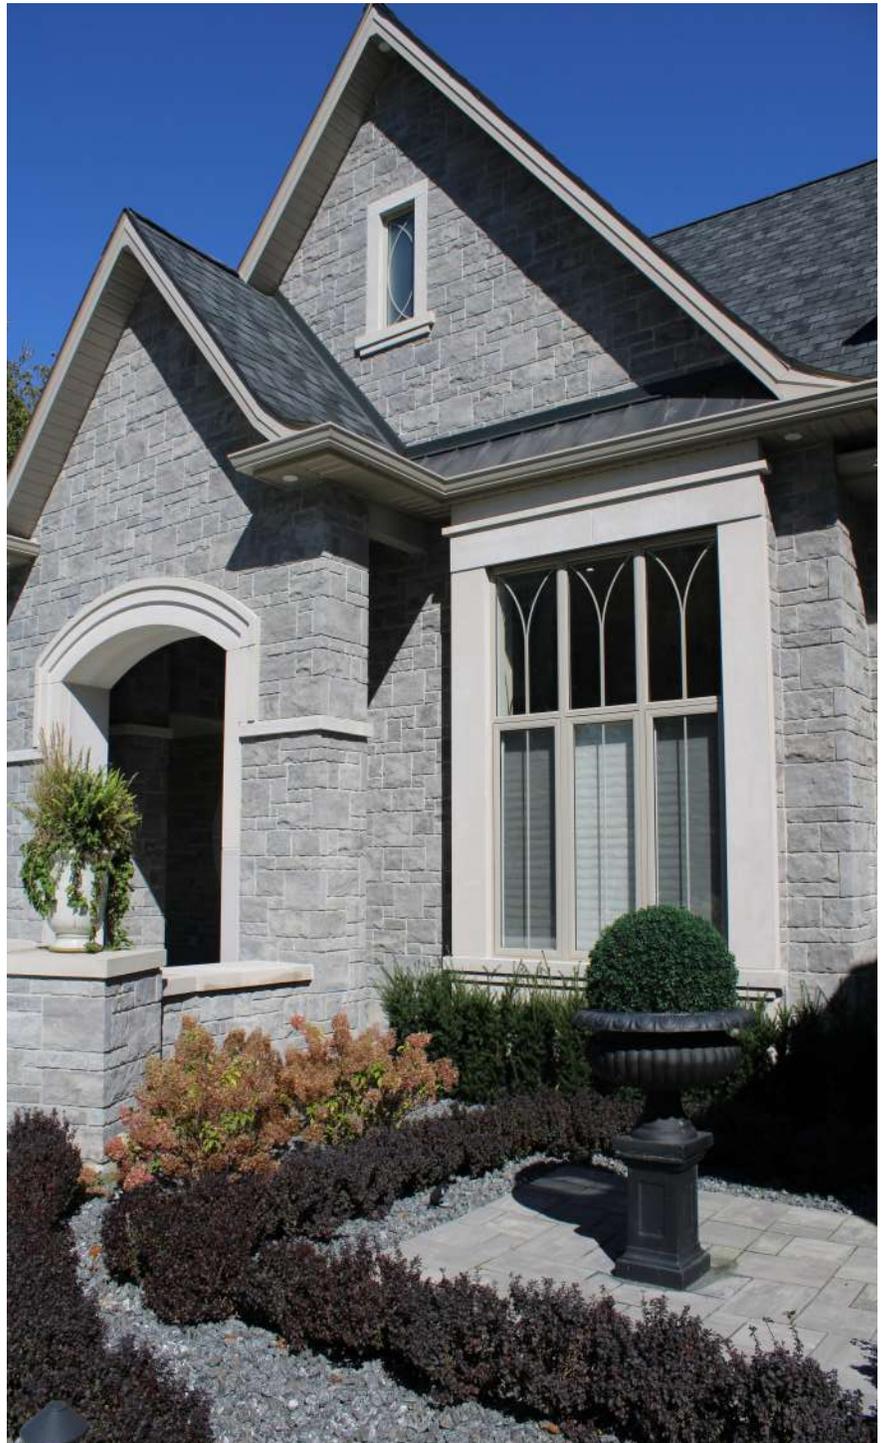

Canterbury Newcastle Grey & Carbon

Canterbury Somerset; Top Left
 Canterbury Newcastle Grey; Top Right
 Canterbury Cloud White; Bottom Left
 Canterbury Silverstone & Ebony; Bottom Right

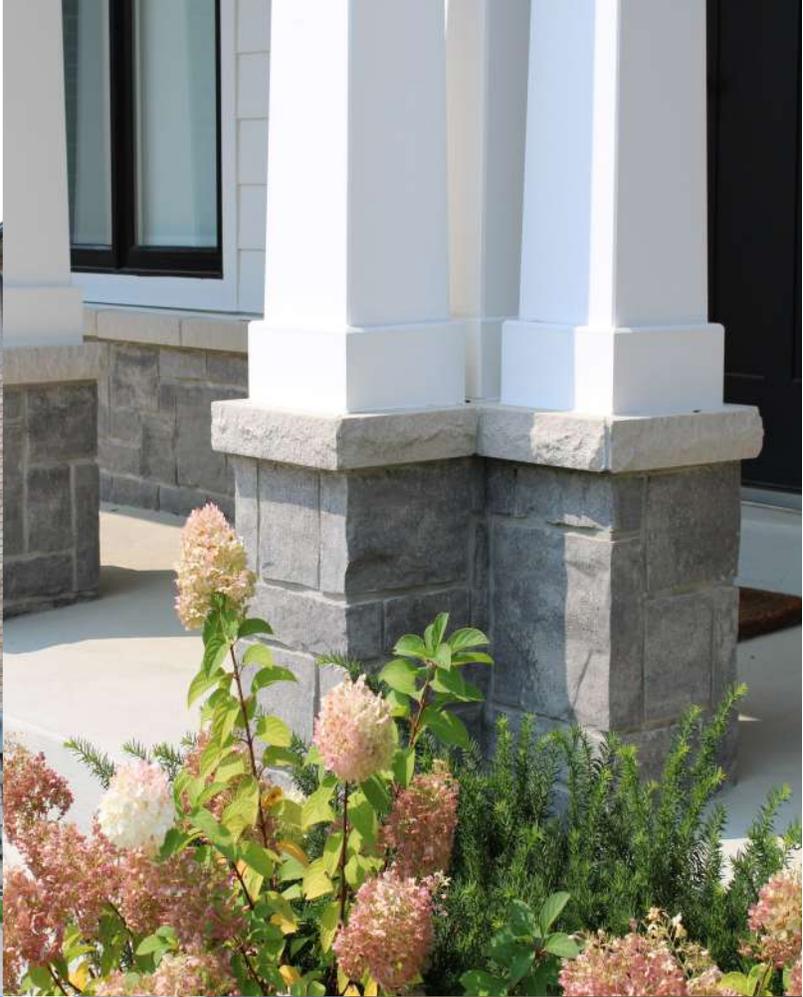



Canterbury Bedford & Somerset



Bedford



Carbon



Cloud White



Ebony



Muskoka Grey



Newcastle Grey



Quarry White



Shale



Silverstone



Somerset



SMALL

3.5"H x 3.5"D x
Various Lengths
89mm x 89mm x



MEDIUM

7.5"H x 3.5"D x
Various Lengths
190mm x 89mm x



LARGE


11.5"H x 3.5"D x
Various Lengths
292mm x 89mm x
Various Lengths

2 UNIT BUNDLE


PACKAGING SPECIFICATIONS

Canterbury Stone	Per Full Pallet				Per Layer		
	Sq.Ft.	Pieces	Layers	Weight	Sq.Ft.	Pieces	Weight
Small/Medium Stone	78	SM - 72 Med - 72	6	2898-lbs	13	SM - 12 MED - 12	
Large Stone	72	48	6	2423-lbs	12	8	

PALLET OVERVIEW




Small/Medium Stone Pallet



Large Stone Pallet

LAYING PATTERNS

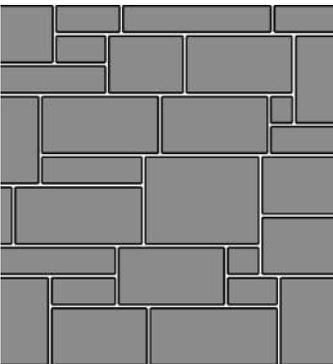

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m³ and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

Head Office

7885 Howard Avenue
Amherstburg, ON, CA
[519-726-5444](tel:519-726-5444)
[1-800-771-0658](tel:1-800-771-0658)

santerrastonecraft.com



Retail Design Centre

5115 Rhodes Drive
Windsor, ON, CA
[519-944-7737](tel:519-944-7737)
[1-888-369-3449](tel:1-888-369-3449)



Prescott Stone 12/300 Cloud White Matte



4/100

3.5"H x 23.25"L x 3.5"D

90mm x 590mm x 90mm



8/200

7.5"H x 23.25"L x 3.5"D

192mm x 590mm x 90mm



12/300

11.5"H x 23.25"L x 3.5"D

292mm x 590mm x 90mm



Charcoal



Charcoal Matte



Quarry White



Quarry White Matte



Cloud White



Cloud White Matte



Sandstone



Sandstone Matte



Ebony Black



Ebony Black Matte



Diamond White*



Diamond White Matte*



Pewter



Pewter Matte



Granite Black*




Granite Black Matte*

**Denotes a Premium Colour*


PACKAGING SPECIFICATIONS

Prescott Stone	Per Full Pallet				Per Layer			Sq.Ft/Pc	Pcs/Sq.Ft.
	Sq.Ft.	Pieces	Layers	Weight	Sq.Ft.	Pieces	Weight		
4/100	106	160	8	4264-lbs	13.25	20			1.5
8/200	106	80	8	4254-lbs	13.25	10			0.75
12/300	72	36	6	2892-lbs	12	6			0.5


PALLET OVERVIEW



Prescott Stone 4/100




Prescott Stone 8/200




Prescott Stone 12/300

LAYING PATTERNS



Stack Bond



1/2 Bond

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m3 and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

Head Office

7885 Howard Avenue
Amherstburg, ON, CA
[519-726-5444](tel:519-726-5444)
[1-800-771-0658](tel:1-800-771-0658)

santerrastonecraft.com



Retail Design Centre

5115 Rhodes Drive
Windsor, ON, CA
[519-944-7737](tel:519-944-7737)
[1-888-369-3449](tel:1-888-369-3449)



Prescott Stone Ebony Black




Prescott Stone Cloud White



Chelsea Matte Cloud White with White Mortar



3.125"H x 10.125"L x 3.5"D
79mm x 257mm x 89mm



Ashwood




Aspen Range



Cloud White



Ebony



Silverstone



Shale




Windsor Grey

PACKAGING SPECIFICATIONS


Chelsea Matte Brick	Per Full Pallet				Per Layer			Sq.Ft/Pc	Pcs/Sq.Ft.
	Sq.Ft.	Pieces	Layers	Weight	Sq.Ft.	Pieces	Weight		
	99	384	8	2477-lbs	12.4	48			3.9

PALLET OVERVIEW




Chelsea Matte Brick


LAYING PATTERNS



Stack Bond



1/2 Bond



1/3 Bond

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m³ and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.




Bedford



Carbon



Cloud White



Ebony



Muskoka Grey



Newcastle Grey



Quarry White



Somerset

Kensington Brick Bedford




3.125"H x 10.125"L x 3.5"D

79mm x 257mm x 89mm

PACKAGING SPECIFICATIONS


Kensington Brick	Per Full Pallet				Per Layer			Sq.Ft/Pc	Pcs/Sq.Ft.
	Sq.Ft.	Pieces	Layers	Weight	Sq.Ft.	Pieces	Weight		
	74	288	6	2500-lbs	12.3	48			3.9

PALLET OVERVIEW




Kensington Brick


LAYING PATTERNS



Stack Bond



1/2 Bond



1/3 Bond

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m³ and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

Head Office

7885 Howard Avenue
Amherstburg, ON, CA
[519-726-5444](tel:519-726-5444)
[1-800-771-0658](tel:1-800-771-0658)

santerrastonecraft.com



Retail Design Centre

5115 Rhodes Drive
Windsor, ON, CA
[519-944-7737](tel:519-944-7737)
[1-888-369-3449](tel:1-888-369-3449)




Bedford



Carbon



Cloud White



Ebony



Muskoka Grey



Newcastle Grey



Quarry White



Somerset

Oxford Brick Carbon



3.5" H x 11.5" L x 3.5" D

89mm x 292mm x 89mm

Head Office

7885 Howard Avenue
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

santerrastonecraft.com



Retail Design Centre

5115 Rhodes Drive
Windsor, ON, CA


[519-944-7737](tel:519-944-7737)

[1-888-369-3449](tel:1-888-369-3449)

PACKAGING SPECIFICATIONS


Oxford Brick	Per Full Pallet				Per Layer			Sq.Ft/Pc	Pcs/Sq.Ft.
	Sq.Ft.	Pieces	Layers	Weight	Sq.Ft.	Pieces	Weight		
	80	240	6	2600-lbs	13.33	45			3

PALLET OVERVIEW




Oxford Brick


LAYING PATTERNS



Stack Bond



1/2 Bond




1/3 Bond

Concrete masonry veneer units that are 90mm (3.5”) or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m³ and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.



Cloud White



Natural

Split Rock Brick Cloud White




2.625" H x 11.625" L x 3.5" D

67mm x 295mm x 89mm

PACKAGING SPECIFICATIONS


Split Rock Brick	Per Full Pallet				Per Layer			Sq.Ft/Pc	Pcs/Sq.Ft.
	Sq.Ft.	Pieces	Layers	Weight	Sq.Ft.	Pieces	Weight		
	97.5	390	10	3250-lbs	9.75	39			4

PALLET OVERVIEW




Split Rock Brick


LAYING PATTERNS



Stack Bond



1/2 Bond



1/3 Bond

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m³ and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

Head Office

7885 Howard Avenue
Amherstburg, ON, CA
[519-726-5444](tel:519-726-5444)
[1-800-771-0658](tel:1-800-771-0658)

santerrastonecraft.com





Retail Design Centre

5115 Rhodes Drive
Windsor, ON, CA
[519-944-7737](tel:519-944-7737)
[1-888-369-3449](tel:1-888-369-3449)

STRETCHER

Availability: Stock

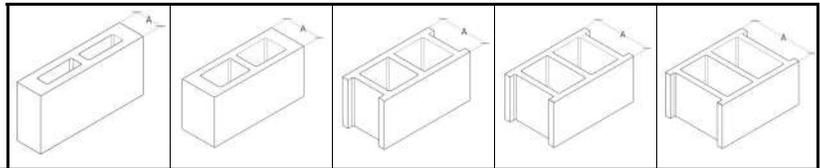


	PHYSICAL DATA					
	Code	4 inch 10 cm	6 inch 15 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	3-5/8" 90 mm	5-5/8" 140 mm	7-5/8" 190 mm	9-5/8" 240 mm	11-5/8" 290 mm
	Pieces per Pallet	120	95	75	67	55
	Percent Solid	73%	58%	56%	53%	51%
	Void	0.07 ft ³ 0.0020 m ³	0.16 ft ³ 0.0045 m ³	0.23 ft ³ 0.0065 m ³	0.31 ft ³ 0.0088 m ³	0.39 ft ³ 0.0110 m ³


PERFORMANCE DATA						
Heavyweight—Class “A”						
Compressive Strength: 15, 20** , 25, 30 MPa Density: 2000+ kg/m ³ Absorption: 175 kg/m ³ max Availability: Stock	Unit Weight	24.0 lb 10.9 kg	29.7 lb 13.5 kg	38.8 lb 17.6 kg	46.5 lb 21.1 kg	53.9 lb 24.5 kg
	Fire Rating	0.8 hr	1.1 hr	1.8 hr	2.4 hr	3.2 hr
	STC	43	46	50	51	53
	R-Value	1.73	1.95	2.10	2.19	2.26
	U-Rating	0.58	0.51	0.48	0.46	0.44
	Mediumweight—Class “B”					
Compressive Strength: 15, 20** , 25, 30 MPa Density: 1800—2000 kg/m ³ Absorption: 200 kg/m ³ max Availability: Stock	Unit Weight	22.2 lb 10.1 kg	27.5 lb 12.5 kg	35.9 lb 16.3 kg	42.9 lb 19.5 kg	49.8 lb 22.6 kg
	Fire Rating	0.8 hr	1.1 hr	1.8 hr	2.4 hr	3.2 hr
	STC	43	46	50	51	53
	R-Value	1.83	2.05	2.21	2.31	2.38
	U-Rating	0.55	0.49	0.45	0.43	0.42
	Lightweight—Class “C”					
Compressive Strength: 15** , 20, 25 MPa Density: 1700—1800 kg/m ³ Absorption: 225 kg/m ³ max Availability: Special Order	Unit Weight	20.0 lb 9.1 kg	24.8 lb 11.3 kg	32.3 lb 14.7 kg	38.7 lb 17.6 kg	44.9 lb 20.4 kg
	Fire Rating	1.1 hr	1.5 hr	2.5 hr	3.5 hr	4.0+ hr
	STC	40	43	46	49	50
	R-Value	1.93	2.23	2.40	2.50	2.59
	U-Rating	0.52	0.45	0.42	0.40	0.39
	Ultra Lightweight—Class “D”					
Compressive Strength: 15** MPa Density: < 1700 kg/m ³ Absorption: 300 kg/m ³ max Availability: Special Order	Unit Weight	16.4 lb 7.5 kg	20.3 lb 9.2 kg	26.5 lb 12.0 kg	31.7 lb 14.4 kg	36.7 lb 16.7 kg
	Fire Rating	1.1 hr	1.6 hr	2.6 hr	4.0+ hr	4.0+ hr
	STC	40	43	46	49	50
	R-Value	2.03	2.45	2.69	2.82	2.93
	U-Rating	0.49	0.40	0.37	0.35	0.34

** supplied unless otherwise specified

SINGLE BULLNOSE


Availability: Stock

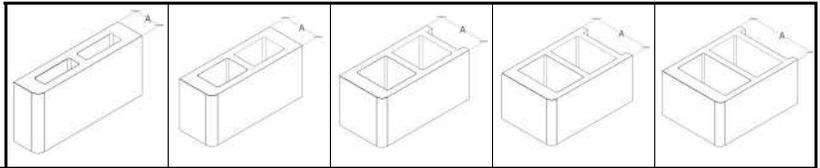


	PHYSICAL DATA					
	Code	4 inch 10 cm	6 inch 15 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	3-5/8" 90 mm	5-5/8" 140 mm	7-5/8" 190 mm	9-5/8" 240 mm	11-5/8" 290 mm
	Pieces per Pallet	120	95	75	65	50
	Percent Solid	73%	58%	56%	53%	51%
	Void	0.07 ft ³ 0.0020 m ³	0.16 ft ³ 0.0045 m ³	0.23 ft ³ 0.0065 m ³	0.31 ft ³ 0.0088 m ³	0.39 ft ³ 0.0110 m ³

DOUBLE BULLNOSE


Availability: Stock

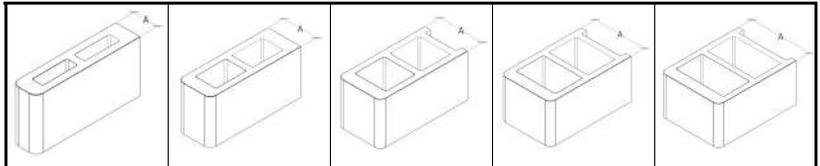


	PHYSICAL DATA					
	Code	4 inch 10 cm	6 inch 15 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	3-5/8" 90 mm	5-5/8" 140 mm	7-5/8" 190 mm	9-5/8" 240 mm	11-5/8" 290 mm
	Pieces per Pallet	120	95	75	65	50
	Percent Solid	73%	58%	56%	53%	51%
	Void	0.07 ft ³ 0.0020 m ³	0.16 ft ³ 0.0045 m ³	0.23 ft ³ 0.0065 m ³	0.31 ft ³ 0.0088 m ³	0.39 ft ³ 0.0110 m ³

BREAKER / SASH

Availability: Stock

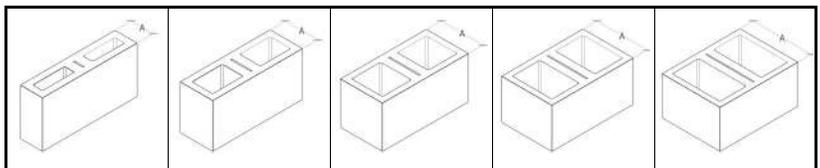



	PHYSICAL DATA					
	Code	4 inch 10 cm	6 inch 15 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	3-5/8" 90 mm	5-5/8" 140 mm	7-5/8" 190 mm	9-5/8" 240 mm	11-5/8" 290 mm
	Pieces per Pallet	*	*	*	67	55
	Percent Solid	73%	58%	56%	53%	51%
	Void	0.07 ft ³ 0.0020 m ³	0.16 ft ³ 0.0045 m ³	0.23 ft ³ 0.0065 m ³	0.31 ft ³ 0.0088 m ³	0.39 ft ³ 0.0110 m ³

* pre-mixed with standard stretcher

HALF SINGLE BULLNOSE


Availability: Stock

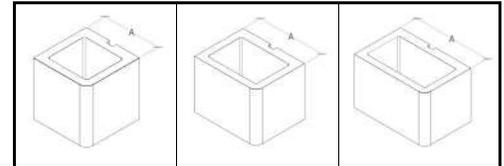


	PHYSICAL DATA			
	Code	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	7-5/8"	9-5/8"	11-5/8"
	Pieces per Pallet	120	104	80
	Percent Solid	56%	53%	51%
	Void	0.12 ft ³ 0.0034 m ³	0.16 ft ³ 0.0045 m ³	0.20 ft ³ 0.0057 m ³

HALF DOUBLE BULLNOSE


Availability: Stock

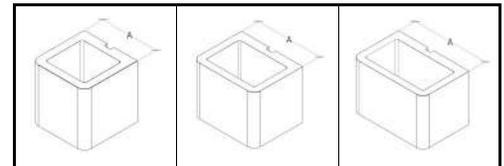


	PHYSICAL DATA			
	Code	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	7-5/8"	9-5/8"	11-5/8"
	Pieces per Pallet	120	104	80
	Percent Solid	56%	53%	51%
	Void	0.12 ft ³ 0.0034 m ³	0.16 ft ³ 0.0045 m ³	0.20 ft ³ 0.0057 m ³


HALF BREAKER / SASH

Availability: Stock

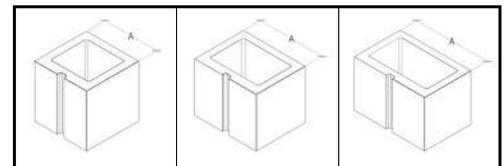


	PHYSICAL DATA			
	Code	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	7-5/8"	9-5/8"	11-5/8"
	Pieces per Pallet	120	104	80
	Percent Solid	56%	53%	51%
	Void	0.12 ft ³ 0.0034 m ³	0.16 ft ³ 0.0045 m ³	0.20 ft ³ 0.0057 m ³


BOND BEAM LINTEL

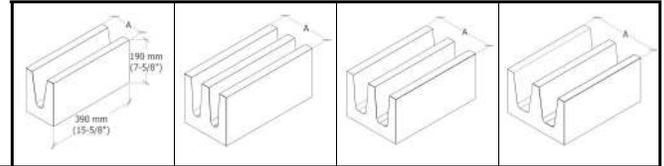


Availability: Stock

	PHYSICAL DATA				
	Code	6 inch 15 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	5-5/8" 140 mm	7-5/8" 190 mm	9-5/8" 240 mm	11-5/8" 290 mm
	Pieces per Pallet	100	75	65	50
	Percent Solid Less slug ^{net}	60%	66%	65%	53%
	Void	0.15 ft ³ 0.0042 m ³	0.17 ft ³ 0.0048 m ³	0.22 ft ³ 0.0062 m ³	0.36 ft ³ 0.0102 m ³


BOND BEAM KNOCKOUT

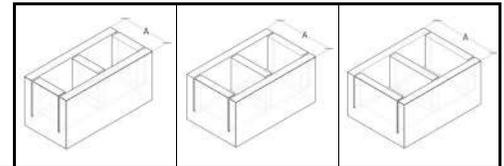


Availability: Stock

	PHYSICAL DATA			
	Code	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	7-5/8" 190 mm	9-5/8" 240 mm	11-5/8" 290 mm
	Pieces per Pallet	75	65	50
	Percent Solid Less slug ^{net}	49% ^{net}	47% ^{net}	46% ^{net}
	Void	0.26 ft ³ 0.0074 m ³	0.34 ft ³ 0.0096 m ³	0.42 ft ³ 0.0119 m ³

CONDUIT KNOCKOUT

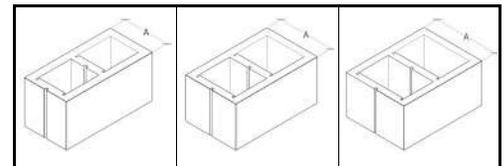


Availability: Stock

	PHYSICAL DATA			
	Code	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	7-5/8" 190 mm	9-5/8" 240 mm	11-5/8" 290 mm
	Pieces per Pallet	75	65	50
	Percent Solid	56%	53%	51%
	Void	N/A	N/A	N/A

RETURN CORNER

Availability: Stock

--	--	--	--	--


	PHYSICAL DATA				
	Code	4 inch 10 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	3-5/8" 90 mm	7-5/8" 190 mm	9-5/8" 240 mm	11-5/8" 290 mm
	Pieces per Pallet	120	*	72	54
	Percent Solid	N/A	56%	N/A	N/A
	Void	N/A	0.23 ft ³ 0.0065 m ³	0.23 ft ³ 0.0065 m ³	0.23 ft ³ 0.065 m ³

* pre-mixed with standard stretcher

SOLID ASHLAR

Availability: Stock


--	--	--	--	--

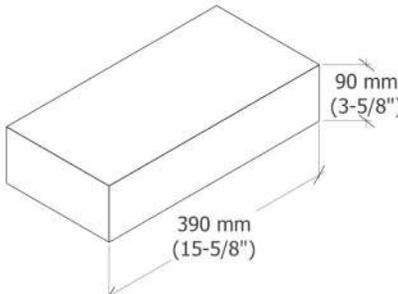	PHYSICAL DATA					
	Code	4 inch 10 cm	6 inch 15 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	3-5/8" 90 mm	5-5/8" 140 mm	7-5/8" 190 mm	9-5/8" 240 mm	11-5/8" 290 mm
	Pieces per Pallet	240	160	120	104	80
	Percent Solid	100%	100%	100%	100%	100%
	Void	N/A	N/A	N/A	N/A	N/A

HOLLOW ASHLAR


Availability: Stock


--	--	--

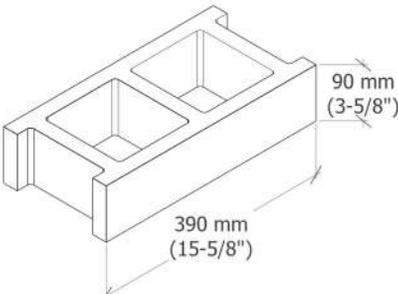	PHYSICAL DATA			
	Code	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	7-5/8" 190 mm	9-5/8" 240 mm	11-5/8" 290 mm
	Pieces per Pallet	120	104	80
	Percent Solid	56%	53%	51%
	Void	0.12 ft ³ 0.0034 m ³	0.16 ft ³ 0.0045 m ³	0.20 ft ³ 0.0057 m ³

75% SOLID STRETCHER


Availability: Special Order

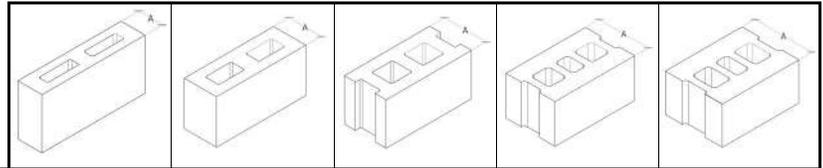


	PHYSICAL DATA					
	Code	4 inch 10 cm	6 inch 15 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension	3-5/8"	5-5/8"	7-5/8"	9-5/8"	11-5/8"
	Pieces per Pallet	120	100	75	56	53
	Percent Solid	75%	75%	75%	75%	75%
	Void	0.07 ft ³ 0.0020 m ³	0.10 ft ³ 0.0028 m ³	0.13 ft ³ 0.0037 m ³	0.17 ft ³ 0.0048 m ³	0.20 ft ³ 0.0056 m ³

66% SOLID STRETCHER (2-HOUR FIRE RATING)


Availability: Special Order




	PHYSICAL DATA	
	Code	20 cm
	A-Dimension	190 mm
	Pieces per Pallet	75
	Percent Solid	66%
	Void	0.0051 m ³
Fire Rating	2.0 hr	

SEMI-SOLID

Availability: Stock

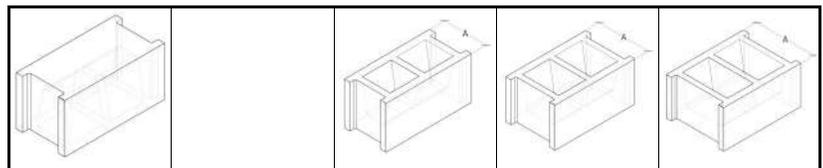


	PHYSICAL DATA				
	Code	Alternate View	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm
	A-Dimension		7-5/8"	9-5/8"	11-5/8"
	Pieces per Pallet		75	56	53
	Percent Solid		66%	62%	61%
	Void		0.18 ft ³ 0.0051 m ³	0.25 ft ³ 0.0071 m ³	0.31 ft ³ 0.0088 m ³


2" SOLID ASHLAR




Availability: Stock

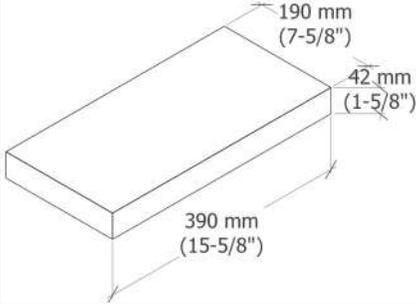	PHYSICAL DATA	
	Code	2 inch 5 cm
	Height	1-5/8" 42 mm
	Pieces per Pallet	240
	Percent Solid	100%
	Void	N/A N/A


BACK UP BRICK




Availability: Stock

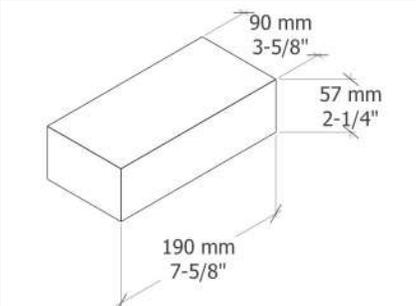	PHYSICAL DATA	
	Code	N/A
	Height	2-1/4" 57 mm
	Pieces per Pallet	720 full 360 half
	Percent Solid	100%
	Void	N/A N/A


CHIMNEY BLOCK




Availability: Stock

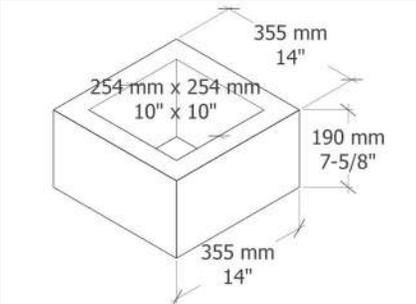	PHYSICAL DATA	
	Outer Dimension	14" 355 mm
	Inner Dimension	10" 254 mm
	Pieces per Pallet	33
	Percent Solid	57%
	Void	0.44 ft ³ 0.0125 m ³


STRETCHER



BREAKER



CORNER

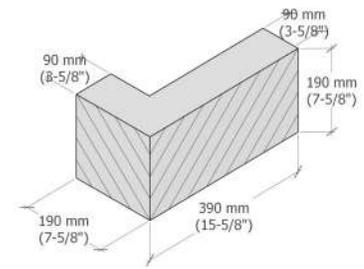


PHYSICAL DATA

Code	4 inch 10 cm	6 inch 15 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm	L Return
A-Dimension	3-5/8"	5-5/8"	7-5/8"	9-5/8"	11-5/8"	3-5/8"
	90 mm	140 mm	190 mm	240 mm	290 mm	90 mm
Pieces per Pallet	120	100	75	56	53	120
Percent Solid	100%	64%	59%	56%	53%	N/A
Void	N/A	0.14 ft ³	0.22 ft ³	0.29 ft ³	0.38 ft ³	N/A
	N/A	0.0040 m ³	0.0062 m ³	0.0082 m ³	0.0108 m ³	N/A


PERFORMANCE DATA

Unit Weight	33.0 lb	32.3 lb	41.3 lb	48.9 lb	56.2 lb	33.0 lb
	15.0 kg	14.7 kg	18.8 kg	22.2 kg	25.5 kg	15.0 kg
Fire Rating	1.5 hr	1.4 hr	2.2 hr	3.0 hr	3.4 hr	1.5 hr
STC	43	46	50	51	53	43
R-Value	1.73	1.95	2.09	2.15	2.20	1.73
U-Rating	0.577	0.514	0.478	0.464	0.455	0.577

STYLES



SPLITFACE



SPLIT RIB 2




SPLIT RIB 3




SPLIT RIB 4




SPLIT RIB 6




STRETCHER COLOURED




PROFILE



1-SCORE



LEDGE



PRESTIGE

Heavyweight—Class "A"	Compressive Strength: 15 MPa
Density: 2000+ kg/m ³	Absorption: 175 kg/m ³ max
Availability: Special Order	

Head Office

7885 Howard Avenue
Amherstburg, ON, CA
[519-726-5444](tel:519-726-5444)
[1-800-771-0658](tel:1-800-771-0658)

santerrastonecraft.com



Retail Design Centre

5115 Rhodes Drive
Windsor, ON, CA
[519-944-7737](tel:519-944-7737)
[1-888-369-3449](tel:1-888-369-3449)

