





## Contents

### Stone


|                         |           |
|-------------------------|-----------|
| <b>Berkeley Stone</b>   | <b>4</b>  |
| <b>Camden Stone</b>     | <b>6</b>  |
| <b>Canterbury Stone</b> | <b>8</b>  |
| <b>Prescott Stone</b>   | <b>10</b> |

### Brick

|                            |           |
|----------------------------|-----------|
| <b>Chelsea Matte Brick</b> | <b>14</b> |
| <b>Kensington Brick</b>    | <b>16</b> |
| <b>Oxford Brick</b>        | <b>18</b> |
| <b>Split Rock Brick</b>    | <b>20</b> |

### Block

|                            |           |
|----------------------------|-----------|
| <b>Standard Block</b>      | <b>22</b> |
| <b>Architectural Block</b> | <b>29</b> |

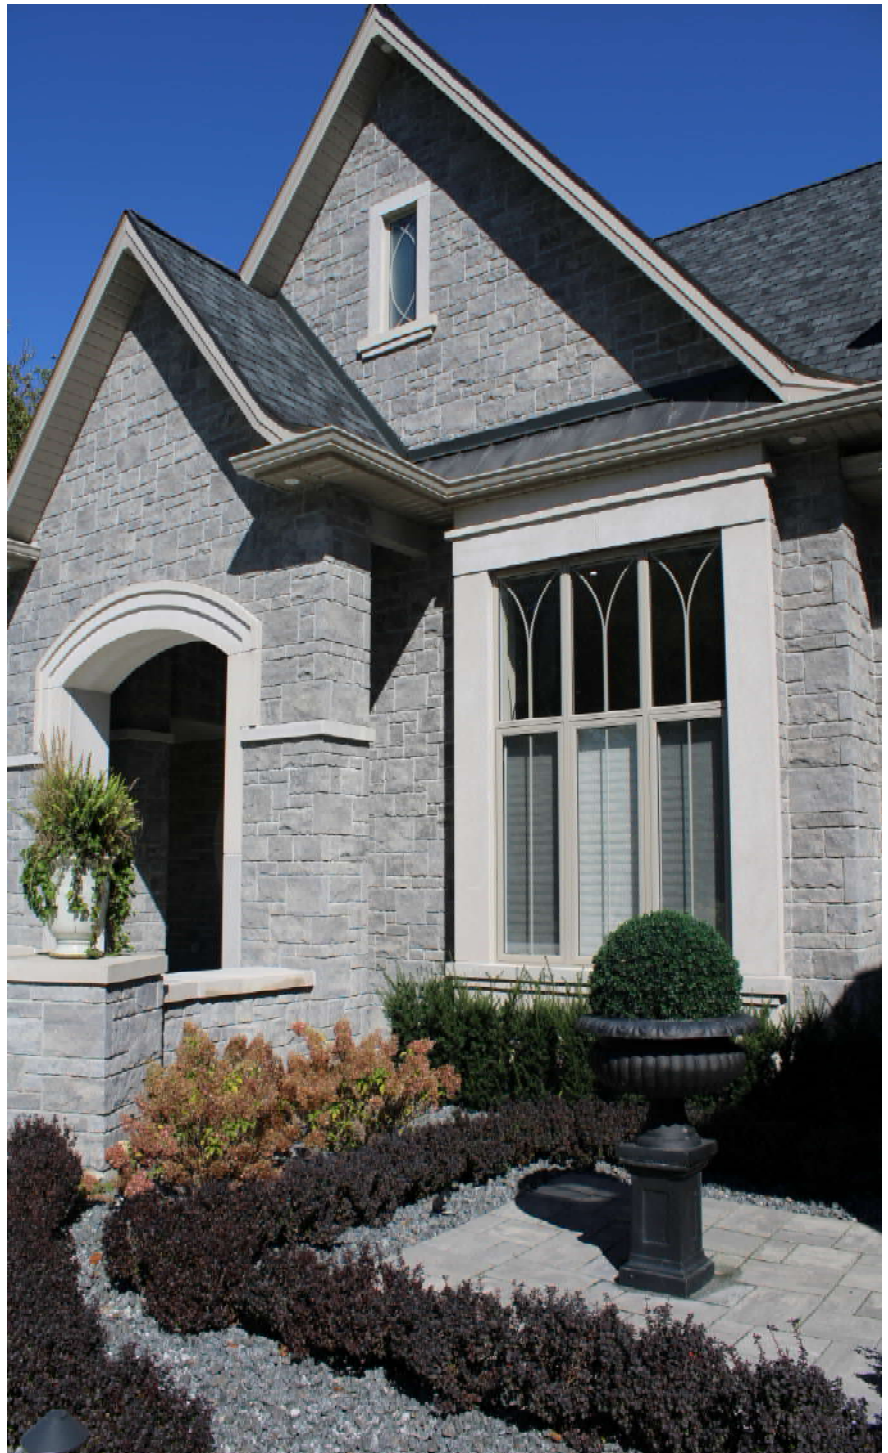

Canterbury Newcastle Grey & Carbon

Canterbury Somerset; Top Left  
 Canterbury Newcastle Grey; Top Right  
 Canterbury Cloud White; Bottom Left  
 Canterbury Silverstone & Ebony; Bottom Right









Carbon



Cloud White



Frost



Harbour Grey



Moonlight



**SMALL**

2.25"H x 3.5"D x  
Various Lengths

57mm x 90mm x  
Various Lengths

**MEDIUM**

4-7/8"H x 3.5"D x  
Various Lengths

124mm x 90mm x  
Various Lengths

**LARGE**

7.5"H x 3.5"D x  
Various Lengths

190mm x 90mm x  
Various Lengths

**3 UNIT BUNDLE**

### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA


[519-944-7737](tel:519-944-7737)

[1-888-369-3449](tel:1-888-369-3449)

### PACKAGING SPECIFICATIONS


| Berkeley Stone     | Per Full Pallet |                |        |        | Per Layer |             |        |
|--------------------|-----------------|----------------|--------|--------|-----------|-------------|--------|
|                    | Sq.Ft.          | Pieces         | Layers | Weight | Sq.Ft.    | Pieces      | Weight |
| Multi-Stone Bundle | 78              | S- 60<br>M- 48 | 6      | 3024   | 13        | S-10<br>M-8 | 504    |

### PALLET OVERVIEW




Multi-Stone Pallet

### LAYING PATTERNS



Ashlar Pattern

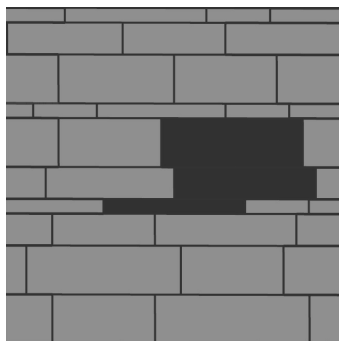

Coursed Linear Pattern

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m<sup>3</sup> and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra

#### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA  
[519-726-5444](tel:519-726-5444)  
[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



#### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA  
[519-944-7737](tel:519-944-7737)  
[1-888-369-3449](tel:1-888-369-3449)





Cloud White



Iceberg



Ivory Mist



Sea Salt



**SMALL**

2.25"H x 3.5"D x  
Various Lengths

57mm x 90mm x  
Various Lengths

**MEDIUM**

4-7/8"H x 3.5"D x  
Various Lengths

124mm x 90mm x  
Various Lengths

**LARGE**

7.5"H x 3.5"D x  
Various Lengths

190mm x 90mm x  
Various Lengths

**3 UNIT BUNDLE**

**Head Office**

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



**Retail Design Centre**

5115 Rhodes Drive  
Windsor, ON, CA


[519-944-7737](tel:519-944-7737)

[1-888-369-3449](tel:1-888-369-3449)

## PACKAGING SPECIFICATIONS


| Berkeley Stone     | Per Full Pallet |                |        |        | Per Layer |             |        |
|--------------------|-----------------|----------------|--------|--------|-----------|-------------|--------|
|                    | Sq.Ft.          | Pieces         | Layers | Weight | Sq.Ft.    | Pieces      | Weight |
| Multi-Stone Bundle | 78              | S- 60<br>M- 48 | 6      | 3024   | 13        | S-10<br>M-8 | 504    |

## PALLET OVERVIEW




Multi-Stone Pallet

## LAYING PATTERNS



Ashlar Pattern



Coursed Linear Pattern

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m<sup>3</sup> and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA  
[519-726-5444](tel:519-726-5444)  
[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA  
[519-944-7737](tel:519-944-7737)  
[1-888-369-3449](tel:1-888-369-3449)





Canterbury Bedford & Somerset



Bedford



Carbon



Cloud White



Ebony



Muskoka Grey



Newcastle Grey



Quarry White



Shale



Silverstone



Somerset



**SMALL**

3.5"H x 3.5"D x  
Various Lengths

89mm x 89mm x  
Various Lengths



**MEDIUM**

7.5"H x 3.5"D x  
Various Lengths

190mm x 89mm x  
Various Lengths



**LARGE**

11.5"H x 3.5"D x  
Various Lengths

292mm x 89mm x  
Various Lengths

**2 UNIT BUNDLE**

## Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



## Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA

[519-944-7737](tel:519-944-7737)


[1-888-369-3449](tel:1-888-369-3449)




## PACKAGING SPECIFICATIONS

| Canterbury Stone   | Per Full Pallet |                     |        |          | Per Layer |                     |        |
|--------------------|-----------------|---------------------|--------|----------|-----------|---------------------|--------|
|                    | Sq.Ft.          | Pieces              | Layers | Weight   | Sq.Ft.    | Pieces              | Weight |
| Small/Medium Stone | 78              | SM - 72<br>Med - 72 | 6      | 2898-lbs | 13        | SM - 12<br>MED - 12 |        |
| Large Stone        | 72              | 48                  | 6      | 2423-lbs | 12        | 8                   |        |

## PALLET OVERVIEW




Small/Medium Stone Pallet



Large Stone Pallet

## LAYING PATTERNS

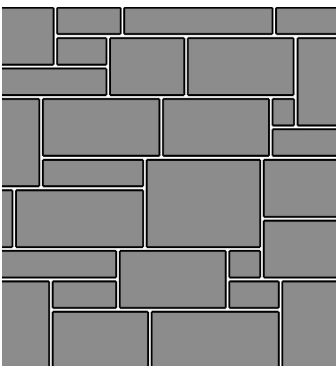

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m<sup>3</sup> and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA  
[519-726-5444](tel:519-726-5444)  
[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA  
[519-944-7737](tel:519-944-7737)  
[1-888-369-3449](tel:1-888-369-3449)



Prescott Stone 12/300 Cloud White Matte



**4/100**

3.5"H x 23.25"L x 3.5"D

90mm x 590mm x 90mm



**8/200**

7.5"H x 23.25"L x 3.5"D

192mm x 590mm x 90mm



**12/300**

11.5"H x 23.25"L x 3.5"D

292mm x 590mm x 90mm

### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA

[519-944-7737](tel:519-944-7737)

[1-888-369-3449](tel:1-888-369-3449)





Charcoal



Charcoal Matte



Quarry White



Quarry White Matte



Cloud White



Cloud White Matte



Sandstone



Sandstone Matte



Ebony Black



Ebony Black Matte



Diamond White\*



Diamond White Matte\*



Pewter



Pewter Matte



Granite Black\*



Granite Black Matte\*

*\*Denotes a Premium Colour*

### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA  
[519-726-5444](tel:519-726-5444)  
[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)




### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA  
[519-944-7737](tel:519-944-7737)  
[1-888-369-3449](tel:1-888-369-3449)


### PACKAGING SPECIFICATIONS

| Prescott Stone | Per Full Pallet |        |        |          | Per Layer |        |        |          |            |
|----------------|-----------------|--------|--------|----------|-----------|--------|--------|----------|------------|
|                | Sq.Ft.          | Pieces | Layers | Weight   | Sq.Ft.    | Pieces | Weight | Sq.Ft/Pc | Pcs/Sq.Ft. |
| <b>4/100</b>   | 106             | 160    | 8      | 4264-lbs | 13.25     | 20     |        |          | 1.5        |
| <b>8/200</b>   | 106             | 80     | 8      | 4254-lbs | 13.25     | 10     |        |          | 0.75       |
| <b>12/300</b>  | 72              | 36     | 6      | 2892-lbs | 12        | 6      |        |          | 0.5        |


### PALLET OVERVIEW



Prescott Stone 4/100




Prescott Stone 8/200




Prescott Stone 12/300

### LAYING PATTERNS



Stack Bond



1/2 Bond

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m3 and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

#### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA  
[519-726-5444](tel:519-726-5444)  
[1-800-771-0658](tel:1-800-771-0658)

#### [santerrastonecraft.com](http://santerrastonecraft.com)



#### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA  
[519-944-7737](tel:519-944-7737)  
[1-888-369-3449](tel:1-888-369-3449)





Prescott Stone Ebony Black



Prescott Stone Cloud White



Chelsea Matte Cloud White with White Mortar



Ashwood



Aspen Range



Cloud White



Ebony



Silverstone



Shale



Windsor Grey

3.125"H x 10.125"L x 3.5"D

79mm x 257mm x 89mm

### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA

[519-944-7737](tel:519-944-7737)


[1-888-369-3449](tel:1-888-369-3449)



## PACKAGING SPECIFICATIONS


| Chelsea Matte Brick | Per Full Pallet |        |        |          | Per Layer |        |        |          |            |
|---------------------|-----------------|--------|--------|----------|-----------|--------|--------|----------|------------|
|                     | Sq.Ft.          | Pieces | Layers | Weight   | Sq.Ft.    | Pieces | Weight | Sq.Ft/Pc | Pcs/Sq.Ft. |
|                     | 99              | 384    | 8      | 2477-lbs | 12.4      | 48     |        |          | 3.9        |

## PALLET OVERVIEW




Chelsea Matte Brick


## LAYING PATTERNS



Stack Bond

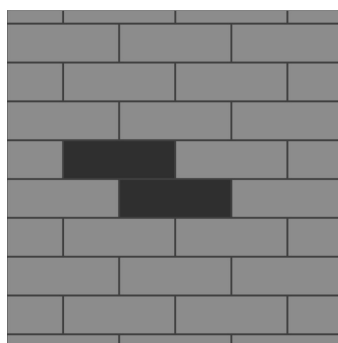

1/2 Bond

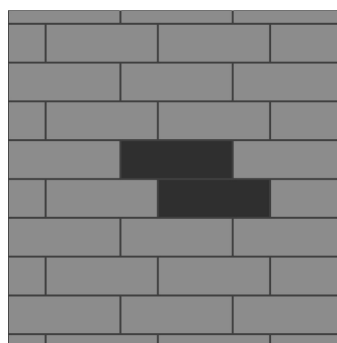

1/3 Bond

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m<sup>3</sup> and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA

[519-944-7737](tel:519-944-7737)

[1-888-369-3449](tel:1-888-369-3449)



Kensington Brick Bedford



Bedford



Carbon



Cloud White



Ebony



Muskoka Grey



Newcastle Grey



Quarry White



Somerset

3.125"H x 10.125"L x 3.5"D

79mm x 257mm x 89mm

## Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



## Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA

[519-944-7737](tel:519-944-7737)

[1-888-369-3449](tel:1-888-369-3449)



## PACKAGING SPECIFICATIONS


|                  | Per Full Pallet |        |        |          | Per Layer |        |        |          |            |
|------------------|-----------------|--------|--------|----------|-----------|--------|--------|----------|------------|
| Kensington Brick | Sq.Ft.          | Pieces | Layers | Weight   | Sq.Ft.    | Pieces | Weight | Sq.Ft/Pc | Pcs/Sq.Ft. |
|                  | 74              | 288    | 6      | 2500-lbs | 12.3      | 48     |        |          | 3.9        |

## PALLET OVERVIEW


|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

Kensington Brick


## LAYING PATTERNS



Stack Bond



1/2 Bond



1/3 Bond

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m<sup>3</sup> and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA  
[519-726-5444](tel:519-726-5444)  
[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA  
[519-944-7737](tel:519-944-7737)  
[1-888-369-3449](tel:1-888-369-3449)



Oxford Brick Carbon



3.5"H x 11.5"L x 3.5"D

89mm x 292mm x 89mm



Bedford



Carbon



Cloud White



Ebony



Muskoka Grey



Newcastle Grey



Quarry White




Somerset



### PACKAGING SPECIFICATIONS


| Oxford Brick | Per Full Pallet |        |        |          | Per Layer |        |        |          |            |
|--------------|-----------------|--------|--------|----------|-----------|--------|--------|----------|------------|
|              | Sq.Ft.          | Pieces | Layers | Weight   | Sq.Ft.    | Pieces | Weight | Sq.Ft/Pc | Pcs/Sq.Ft. |
|              | 80              | 240    | 6      | 2600-lbs | 13.33     | 45     |        |          | 3          |

### PALLET OVERVIEW

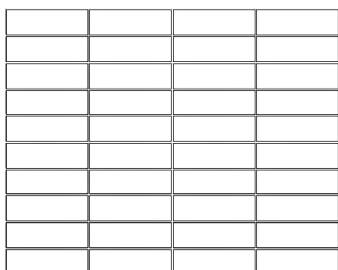


Oxford Brick


### LAYING PATTERNS

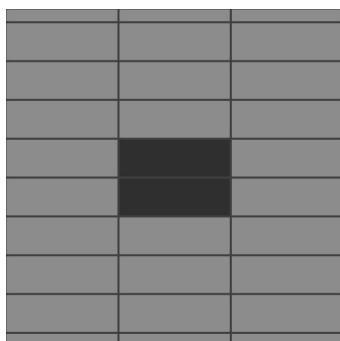

Stack Bond

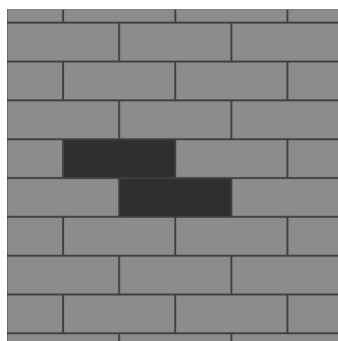

1/2 Bond

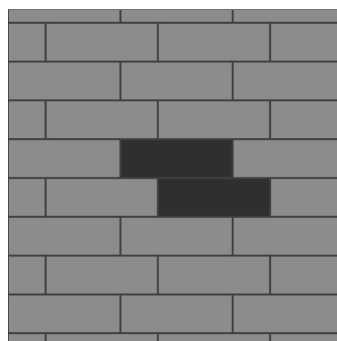

1/3 Bond

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m<sup>3</sup> and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

#### Head Office


7885 Howard Avenue  
Amherstburg, ON, CA  
[519-726-5444](tel:519-726-5444)  
[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



#### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA  
[519-944-7737](tel:519-944-7737)  
[1-888-369-3449](tel:1-888-369-3449)



Cloud White



Natural

Split Rock Brick Cloud White



2.625"H x 11.625"L x 3.5"D

67mm x 295mm x 89mm

### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA

[519-944-7737](tel:519-944-7737)


[1-888-369-3449](tel:1-888-369-3449)



### PACKAGING SPECIFICATIONS


| Split Rock Brick | Per Full Pallet |        |        |          | Per Layer |        |        |          |            |
|------------------|-----------------|--------|--------|----------|-----------|--------|--------|----------|------------|
|                  | Sq.Ft.          | Pieces | Layers | Weight   | Sq.Ft.    | Pieces | Weight | Sq.Ft/Pc | Pcs/Sq.Ft. |
|                  | 97.5            | 390    | 10     | 3250-lbs | 9.75      | 39     |        |          | 4          |

### PALLET OVERVIEW




Split Rock Brick


### LAYING PATTERNS

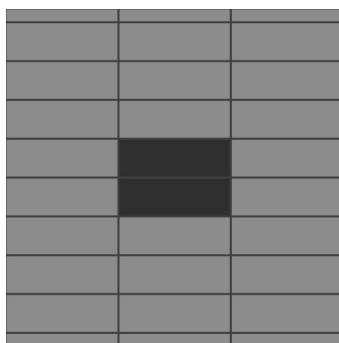

Stack Bond

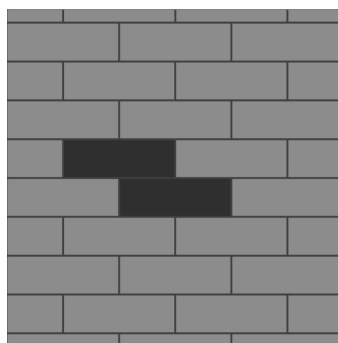

1/2 Bond

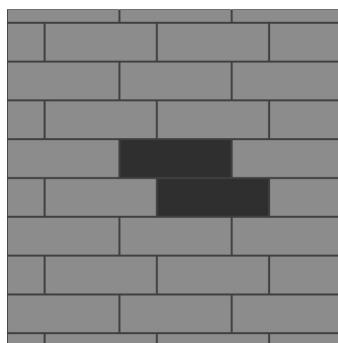

1/3 Bond

Concrete masonry veneer units that are 90mm (3.5") or less in height and produced as a single size will require more frequent control (movement) joint spacing. Refer to the CMHA CMU-TEC-009 series on movement control.

Based on CSA 165.2 for Grade 1, Solid Units, Density over 2000kg/m<sup>3</sup> and ASTM C1634, ASTM C55 for Normal Weight

To ensure proper construction, please refer to your local Building Code(s), Standards and Industry Best Practices. Santerra Stonecraft is not design responsible.

#### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA  
[519-726-5444](tel:519-726-5444)  
[1-800-771-0658](tel:1-800-771-0658)


#### santerrastonecraft.com




#### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA  
[519-944-7737](tel:519-944-7737)  
[1-888-369-3449](tel:1-888-369-3449)

### STRETCHER

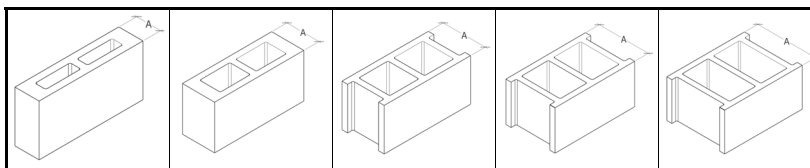



|  | PHYSICAL DATA     |                                               |                                               |                                               |                                               |                                               |
|-----------------------------------------------------------------------------------|-------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                   | Code              | 4 inch<br>10 cm                               | 6 inch<br>15 cm                               | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                   | A-Dimension       | 3-5/8"<br>90 mm                               | 5-5/8"<br>140 mm                              | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                   | Pieces per Pallet | 120                                           | 95                                            | 75                                            | 67                                            | 55                                            |
|                                                                                   | Percent Solid     | 73%                                           | 58%                                           | 56%                                           | 53%                                           | 51%                                           |
|                                                                                   | Void              | 0.07 ft <sup>3</sup><br>0.0020 m <sup>3</sup> | 0.16 ft <sup>3</sup><br>0.0045 m <sup>3</sup> | 0.23 ft <sup>3</sup><br>0.0065 m <sup>3</sup> | 0.31 ft <sup>3</sup><br>0.0088 m <sup>3</sup> | 0.39 ft <sup>3</sup><br>0.0110 m <sup>3</sup> |

| PERFORMANCE DATA                                                                                                                                                              |             |                    |                    |                    |                    |                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Heavyweight—Class “A”                                                                                                                                                         |             |                    |                    |                    |                    |                    |
| Compressive Strength: 15, <b>20**</b> , 25, 30 MPa<br><br>Density: 2000+ kg/m <sup>3</sup><br>Absorption: 175 kg/m <sup>3</sup> max<br><br><b>Availability: Stock</b>         | Unit Weight | 24.0 lb<br>10.9 kg | 29.7 lb<br>13.5 kg | 38.8 lb<br>17.6 kg | 46.5 lb<br>21.1 kg | 53.9 lb<br>24.5 kg |
|                                                                                                                                                                               | Fire Rating | 0.8 hr             | 1.1 hr             | 1.8 hr             | 2.4 hr             | 3.2 hr             |
|                                                                                                                                                                               | STC         | 43                 | 46                 | 50                 | 51                 | 53                 |
|                                                                                                                                                                               | R-Value     | 1.73               | 1.95               | 2.10               | 2.19               | 2.26               |
|                                                                                                                                                                               | U-Rating    | 0.58               | 0.51               | 0.48               | 0.46               | 0.44               |
|                                                                                                                                                                               |             |                    |                    |                    |                    |                    |
| Mediumweight—Class “B”                                                                                                                                                        |             |                    |                    |                    |                    |                    |
| Compressive Strength: 15, <b>20**</b> , 25, 30 MPa<br><br>Density: 1800—2000 kg/m <sup>3</sup><br>Absorption: 200 kg/m <sup>3</sup> max<br><br><b>Availability: Stock</b>     | Unit Weight | 22.2 lb<br>10.1 kg | 27.5 lb<br>12.5 kg | 35.9 lb<br>16.3 kg | 42.9 lb<br>19.5 kg | 49.8 lb<br>22.6 kg |
|                                                                                                                                                                               | Fire Rating | 0.8 hr             | 1.1 hr             | 1.8 hr             | 2.4 hr             | 3.2 hr             |
|                                                                                                                                                                               | STC         | 43                 | 46                 | 50                 | 51                 | 53                 |
|                                                                                                                                                                               | R-Value     | 1.83               | 2.05               | 2.21               | 2.31               | 2.38               |
|                                                                                                                                                                               | U-Rating    | 0.55               | 0.49               | 0.45               | 0.43               | 0.42               |
|                                                                                                                                                                               |             |                    |                    |                    |                    |                    |
| Lightweight—Class “C”                                                                                                                                                         |             |                    |                    |                    |                    |                    |
| Compressive Strength: <b>15**</b> , 20, 25 MPa<br><br>Density: 1700—1800 kg/m <sup>3</sup><br>Absorption: 225 kg/m <sup>3</sup> max<br><br><b>Availability: Special Order</b> | Unit Weight | 20.0 lb<br>9.1 kg  | 24.8 lb<br>11.3 kg | 32.3 lb<br>14.7 kg | 38.7 lb<br>17.6 kg | 44.9 lb<br>20.4 kg |
|                                                                                                                                                                               | Fire Rating | 1.1 hr             | 1.5 hr             | 2.5 hr             | 3.5 hr             | 4.0+ hr            |
|                                                                                                                                                                               | STC         | 40                 | 43                 | 46                 | 49                 | 50                 |
|                                                                                                                                                                               | R-Value     | 1.93               | 2.23               | 2.40               | 2.50               | 2.59               |
|                                                                                                                                                                               | U-Rating    | 0.52               | 0.45               | 0.42               | 0.40               | 0.39               |
|                                                                                                                                                                               |             |                    |                    |                    |                    |                    |
| Ultra Lightweight—Class “D”                                                                                                                                                   |             |                    |                    |                    |                    |                    |
| Compressive Strength: <b>15**</b> MPa<br><br>Density: < 1700 kg/m <sup>3</sup><br>Absorption: 300 kg/m <sup>3</sup> max<br><br><b>Availability: Special Order</b>             | Unit Weight | 16.4 lb<br>7.5 kg  | 20.3 lb<br>9.2 kg  | 26.5 lb<br>12.0 kg | 31.7 lb<br>14.4 kg | 36.7 lb<br>16.7 kg |
|                                                                                                                                                                               | Fire Rating | 1.1 hr             | 1.6 hr             | 2.6 hr             | 4.0+ hr            | 4.0+ hr            |
|                                                                                                                                                                               | STC         | 40                 | 43                 | 46                 | 49                 | 50                 |
|                                                                                                                                                                               | R-Value     | 2.03               | 2.45               | 2.69               | 2.82               | 2.93               |
|                                                                                                                                                                               | U-Rating    | 0.49               | 0.40               | 0.37               | 0.35               | 0.34               |
|                                                                                                                                                                               |             |                    |                    |                    |                    |                    |


\*\* supplied unless otherwise specified


### SINGLE BULLNOSE

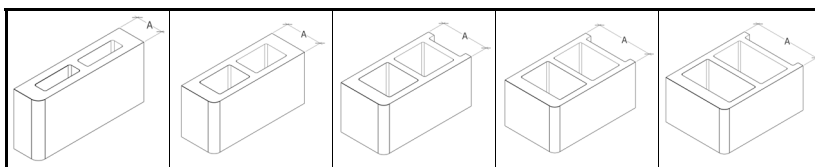


|  | PHYSICAL DATA     |                                               |                                               |                                               |                                               |                                               |
|-----------------------------------------------------------------------------------|-------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                   | Code              | 4 inch<br>10 cm                               | 6 inch<br>15 cm                               | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                   | A-Dimension       | 3-5/8"<br>90 mm                               | 5-5/8"<br>140 mm                              | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                   | Pieces per Pallet | 120                                           | 95                                            | 75                                            | 65                                            | 50                                            |
|                                                                                   | Percent Solid     | 73%                                           | 58%                                           | 56%                                           | 53%                                           | 51%                                           |
|                                                                                   | Void              | 0.07 ft <sup>3</sup><br>0.0020 m <sup>3</sup> | 0.16 ft <sup>3</sup><br>0.0045 m <sup>3</sup> | 0.23 ft <sup>3</sup><br>0.0065 m <sup>3</sup> | 0.31 ft <sup>3</sup><br>0.0088 m <sup>3</sup> | 0.39 ft <sup>3</sup><br>0.0110 m <sup>3</sup> |


### DOUBLE BULLNOSE

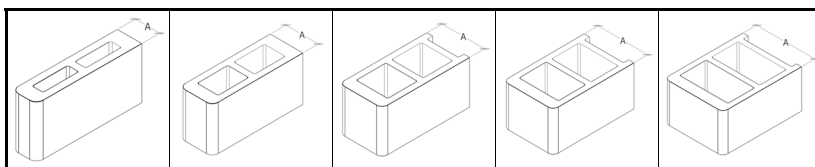
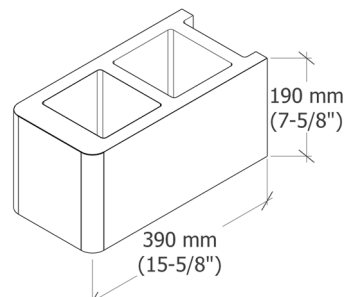
|  | PHYSICAL DATA     |                                               |                                               |                                               |                                               |                                               |
|------------------------------------------------------------------------------------|-------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                    | Code              | 4 inch<br>10 cm                               | 6 inch<br>15 cm                               | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                    | A-Dimension       | 3-5/8"<br>90 mm                               | 5-5/8"<br>140 mm                              | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                    | Pieces per Pallet | 120                                           | 95                                            | 75                                            | 65                                            | 50                                            |
|                                                                                    | Percent Solid     | 73%                                           | 58%                                           | 56%                                           | 53%                                           | 51%                                           |
|                                                                                    | Void              | 0.07 ft <sup>3</sup><br>0.0020 m <sup>3</sup> | 0.16 ft <sup>3</sup><br>0.0045 m <sup>3</sup> | 0.23 ft <sup>3</sup><br>0.0065 m <sup>3</sup> | 0.31 ft <sup>3</sup><br>0.0088 m <sup>3</sup> | 0.39 ft <sup>3</sup><br>0.0110 m <sup>3</sup> |

### BREAKER / SASH

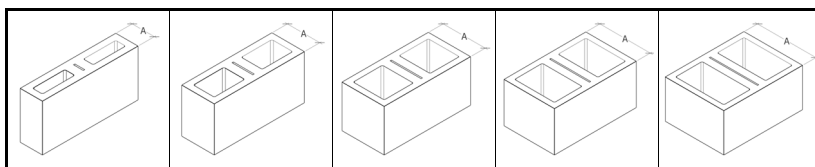

|  | PHYSICAL DATA     |                                               |                                               |                                               |                                               |                                               |
|-------------------------------------------------------------------------------------|-------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                     | Code              | 4 inch<br>10 cm                               | 6 inch<br>15 cm                               | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                     | A-Dimension       | 3-5/8"<br>90 mm                               | 5-5/8"<br>140 mm                              | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                     | Pieces per Pallet | *                                             | *                                             | *                                             | 67                                            | 55                                            |
|                                                                                     | Percent Solid     | 73%                                           | 58%                                           | 56%                                           | 53%                                           | 51%                                           |
|                                                                                     | Void              | 0.07 ft <sup>3</sup><br>0.0020 m <sup>3</sup> | 0.16 ft <sup>3</sup><br>0.0045 m <sup>3</sup> | 0.23 ft <sup>3</sup><br>0.0065 m <sup>3</sup> | 0.31 ft <sup>3</sup><br>0.0088 m <sup>3</sup> | 0.39 ft <sup>3</sup><br>0.0110 m <sup>3</sup> |

\* pre-mixed with standard stretcher

#### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

519-726-5444

1-800-771-0658

santerrastonecraft.com



#### Retail Design Centre


5115 Rhodes Drive  
Windsor, ON, CA


519-944-7737

1-888-369-3449





### HALF SINGLE BULLNOSE

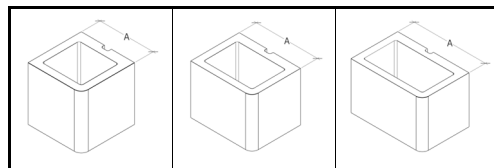


|  | PHYSICAL DATA     |                                               |                                               |                                               |
|-----------------------------------------------------------------------------------|-------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                   | Code              | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                   | A-Dimension       | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                   | Pieces per Pallet | 120                                           | 104                                           | 80                                            |
|                                                                                   | Percent Solid     | 56%                                           | 53%                                           | 51%                                           |
|                                                                                   | Void              | 0.12 ft <sup>3</sup><br>0.0034 m <sup>3</sup> | 0.16 ft <sup>3</sup><br>0.0045 m <sup>3</sup> | 0.20 ft <sup>3</sup><br>0.0057 m <sup>3</sup> |
|                                                                                   |                   |                                               |                                               |                                               |


### HALF DOUBLE BULLNOSE

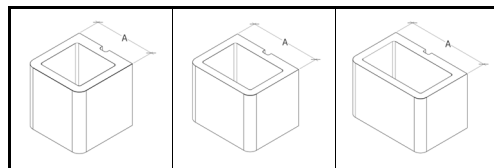

|  | PHYSICAL DATA     |                                               |                                               |                                               |
|------------------------------------------------------------------------------------|-------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                    | Code              | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                    | A-Dimension       | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                    | Pieces per Pallet | 120                                           | 104                                           | 80                                            |
|                                                                                    | Percent Solid     | 56%                                           | 53%                                           | 51%                                           |
|                                                                                    | Void              | 0.12 ft <sup>3</sup><br>0.0034 m <sup>3</sup> | 0.16 ft <sup>3</sup><br>0.0045 m <sup>3</sup> | 0.20 ft <sup>3</sup><br>0.0057 m <sup>3</sup> |
|                                                                                    |                   |                                               |                                               |                                               |

### HALF BREAKER / SASH

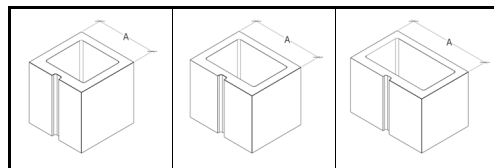
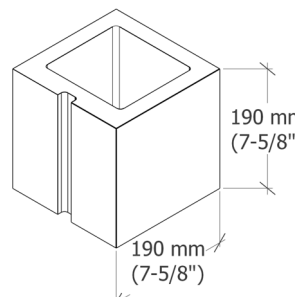
|  | PHYSICAL DATA     |                                               |                                               |                                               |
|-------------------------------------------------------------------------------------|-------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                     | Code              | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                     | A-Dimension       | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                     | Pieces per Pallet | 120                                           | 104                                           | 80                                            |
|                                                                                     | Percent Solid     | 56%                                           | 53%                                           | 51%                                           |
|                                                                                     | Void              | 0.12 ft <sup>3</sup><br>0.0034 m <sup>3</sup> | 0.16 ft <sup>3</sup><br>0.0045 m <sup>3</sup> | 0.20 ft <sup>3</sup><br>0.0057 m <sup>3</sup> |
|                                                                                     |                   |                                               |                                               |                                               |

#### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)




#### Retail Design Centre


5115 Rhodes Drive  
Windsor, ON, CA

[519-944-7737](tel:519-944-7737)


[1-888-369-3449](tel:1-888-369-3449)


### BOND BEAM LINTEL

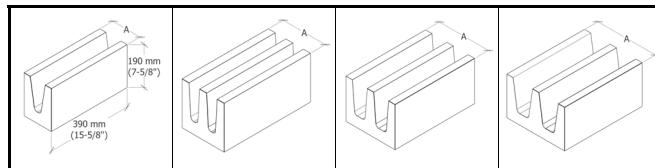


|  | PHYSICAL DATA                             |                                               |                                               |                                               |                                               |
|-----------------------------------------------------------------------------------|-------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                   | Code                                      | 6 inch<br>15 cm                               | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                   | A-Dimension                               | 5-5/8"<br>140 mm                              | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                   | Pieces per Pallet                         | 100                                           | 75                                            | 65                                            | 50                                            |
|                                                                                   | Percent Solid<br>Less slug <sup>net</sup> | 60%                                           | 66%                                           | 65%                                           | 53%                                           |
|                                                                                   | Void                                      | 0.15 ft <sup>3</sup><br>0.0042 m <sup>3</sup> | 0.17 ft <sup>3</sup><br>0.0048 m <sup>3</sup> | 0.22 ft <sup>3</sup><br>0.0062 m <sup>3</sup> | 0.36 ft <sup>3</sup><br>0.0102 m <sup>3</sup> |


### BOND BEAM KNOCKOUT

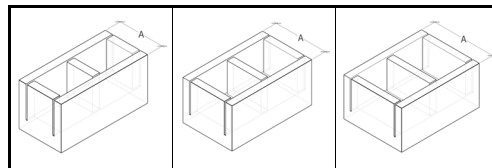
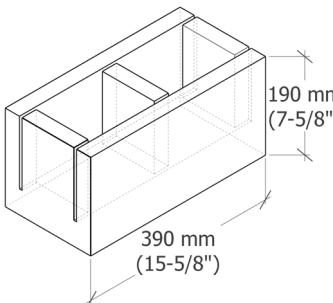
|  | PHYSICAL DATA                             |                                               |                                               |                                               |  |
|------------------------------------------------------------------------------------|-------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|--|
|                                                                                    | Code                                      | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |  |
|                                                                                    | A-Dimension                               | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |  |
|                                                                                    | Pieces per Pallet                         | 75                                            | 65                                            | 50                                            |  |
|                                                                                    | Percent Solid<br>Less slug <sup>net</sup> | 49% <sup>net</sup>                            | 47% <sup>net</sup>                            | 46% <sup>net</sup>                            |  |
|                                                                                    | Void                                      | 0.26 ft <sup>3</sup><br>0.0074 m <sup>3</sup> | 0.34 ft <sup>3</sup><br>0.0096 m <sup>3</sup> | 0.42 ft <sup>3</sup><br>0.0119 m <sup>3</sup> |  |

### CONDUIT KNOCKOUT

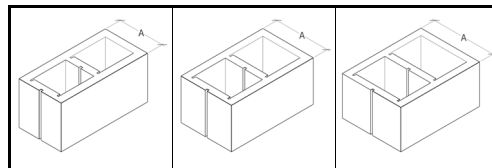
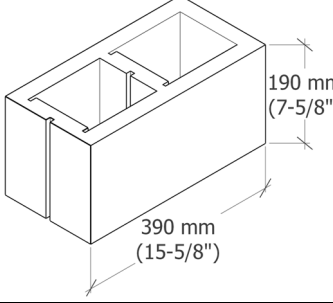
|  | PHYSICAL DATA     |                  |                  |                   |  |
|-------------------------------------------------------------------------------------|-------------------|------------------|------------------|-------------------|--|
|                                                                                     | Code              | 8 inch<br>20 cm  | 10 inch<br>25 cm | 12 inch<br>30 cm  |  |
|                                                                                     | A-Dimension       | 7-5/8"<br>190 mm | 9-5/8"<br>240 mm | 11-5/8"<br>290 mm |  |
|                                                                                     | Pieces per Pallet | 75               | 65               | 50                |  |
|                                                                                     | Percent Solid     | 56%              | 53%              | 51%               |  |
|                                                                                     | Void              | N/A              | N/A              | N/A               |  |

#### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

519-726-5444

1-800-771-0658

santerrastonecraft.com




#### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA

519-944-7737


1-888-369-3449

### RETURN CORNER


|  | PHYSICAL DATA     |                 |                                               |                                               |                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-----------------------------------------------|-----------------------------------------------|----------------------------------------------|
|                                                                                                                                                                          | Code              | 4 inch<br>10 cm | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                             |
|                                                                                                                                                                          | A-Dimension       | 3-5/8"<br>90 mm | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                            |
|                                                                                                                                                                          | Pieces per Pallet | 120             | *                                             | 72                                            | 54                                           |
|                                                                                                                                                                          | Percent Solid     | N/A             | 56%                                           | N/A                                           | N/A                                          |
|                                                                                                                                                                          | Void              | N/A             | 0.23 ft <sup>3</sup><br>0.0065 m <sup>3</sup> | 0.23 ft <sup>3</sup><br>0.0065 m <sup>3</sup> | 0.23 ft <sup>3</sup><br>0.065 m <sup>3</sup> |

\* pre-mixed with standard stretcher

### SOLID ASHLAR
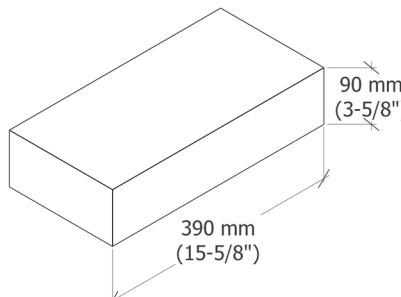
|  | PHYSICAL DATA     |                 |                  |                  |                  |                   |
|------------------------------------------------------------------------------------|-------------------|-----------------|------------------|------------------|------------------|-------------------|
|                                                                                    | Code              | 4 inch<br>10 cm | 6 inch<br>15 cm  | 8 inch<br>20 cm  | 10 inch<br>25 cm | 12 inch<br>30 cm  |
|                                                                                    | A-Dimension       | 3-5/8"<br>90 mm | 5-5/8"<br>140 mm | 7-5/8"<br>190 mm | 9-5/8"<br>240 mm | 11-5/8"<br>290 mm |
|                                                                                    | Pieces per Pallet | 240             | 160              | 120              | 104              | 80                |
|                                                                                    | Percent Solid     | 100%            | 100%             | 100%             | 100%             | 100%              |
|                                                                                    | Void              | N/A             | N/A              | N/A              | N/A              | N/A               |
|                                                                                    |                   | N/A             | N/A              | N/A              | N/A              | N/A               |

### HOLLOW ASHLAR
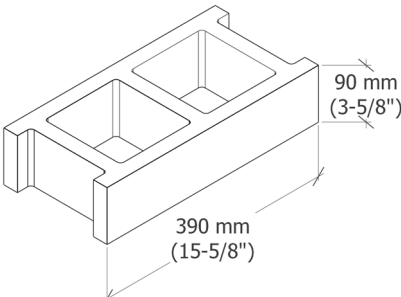
|  | PHYSICAL DATA     |                                               |                                               |                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                                                                                                   | Code              | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                                                                                                   | A-Dimension       | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                                                                                                   | Pieces per Pallet | 120                                           | 104                                           | 80                                            |
|                                                                                                                                                                   | Percent Solid     | 56%                                           | 53%                                           | 51%                                           |
|                                                                                                                                                                   | Void              | 0.12 ft <sup>3</sup><br>0.0034 m <sup>3</sup> | 0.16 ft <sup>3</sup><br>0.0045 m <sup>3</sup> | 0.20 ft <sup>3</sup><br>0.0057 m <sup>3</sup> |

#### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



#### Retail Design Centre


5115 Rhodes Drive  
Windsor, ON, CA


[519-944-7737](tel:519-944-7737)

[1-888-369-3449](tel:1-888-369-3449)




### 75% SOLID STRETCHER

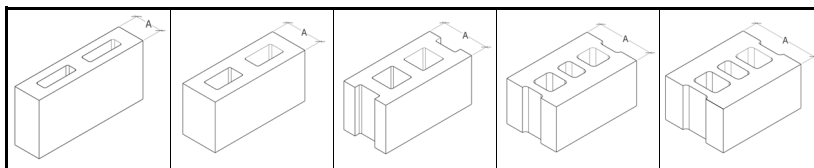


|  | PHYSICAL DATA     |                                               |                                               |                                               |                                               |                                               |
|-----------------------------------------------------------------------------------|-------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                   | Code              | 4 inch<br>10 cm                               | 6 inch<br>15 cm                               | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                   | A-Dimension       | 3-5/8"<br>90 mm                               | 5-5/8"<br>140 mm                              | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                   | Pieces per Pallet | 120                                           | 100                                           | 75                                            | 56                                            | 53                                            |
|                                                                                   | Percent Solid     | 75%                                           | 75%                                           | 75%                                           | 75%                                           | 75%                                           |
|                                                                                   | Void              | 0.07 ft <sup>3</sup><br>0.0020 m <sup>3</sup> | 0.10 ft <sup>3</sup><br>0.0028 m <sup>3</sup> | 0.13 ft <sup>3</sup><br>0.0037 m <sup>3</sup> | 0.17 ft <sup>3</sup><br>0.0048 m <sup>3</sup> | 0.20 ft <sup>3</sup><br>0.0056 m <sup>3</sup> |


### 66% SOLID STRETCHER (2-HOUR FIRE RATING)


Availability: Special Order



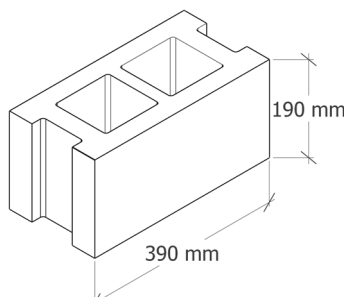
|  | PHYSICAL DATA     |                       |
|------------------------------------------------------------------------------------|-------------------|-----------------------|
|                                                                                    | Code              | 20 cm                 |
|                                                                                    | A-Dimension       | 190 mm                |
|                                                                                    | Pieces per Pallet | 75                    |
|                                                                                    | Percent Solid     | 66%                   |
|                                                                                    | Void              | 0.0051 m <sup>3</sup> |
|                                                                                    | Fire Rating       | 2.0 hr                |


### SEMI-SOLID

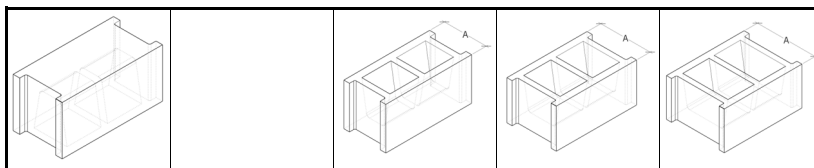

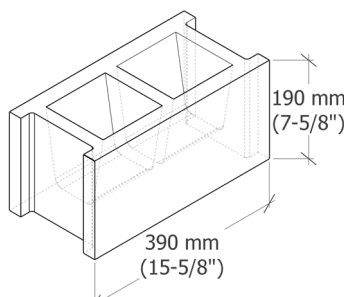
|  | PHYSICAL DATA     |                |                                               |                                               |                                               |
|-------------------------------------------------------------------------------------|-------------------|----------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                                                                     | Code              | Alternate View | 8 inch<br>20 cm                               | 10 inch<br>25 cm                              | 12 inch<br>30 cm                              |
|                                                                                     | A-Dimension       |                | 7-5/8"<br>190 mm                              | 9-5/8"<br>240 mm                              | 11-5/8"<br>290 mm                             |
|                                                                                     | Pieces per Pallet |                | 75                                            | 56                                            | 53                                            |
|                                                                                     | Percent Solid     |                | 66%                                           | 62%                                           | 61%                                           |
|                                                                                     | Void              |                | 0.18 ft <sup>3</sup><br>0.0051 m <sup>3</sup> | 0.25 ft <sup>3</sup><br>0.0071 m <sup>3</sup> | 0.31 ft <sup>3</sup><br>0.0088 m <sup>3</sup> |


## 2" SOLID ASHLAR



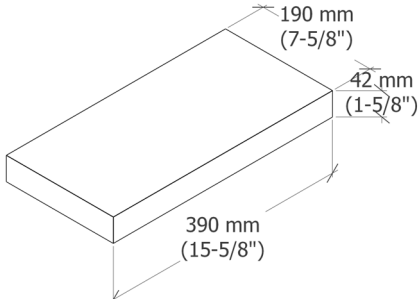
|  | PHYSICAL DATA     |                 |
|-----------------------------------------------------------------------------------|-------------------|-----------------|
|                                                                                   | Code              | 2 inch<br>5 cm  |
|                                                                                   | Height            | 1-5/8"<br>42 mm |
|                                                                                   | Pieces per Pallet | 240             |
|                                                                                   | Percent Solid     | 100%            |
|                                                                                   | Void              | N/A<br>N/A      |


## BACK UP BRICK


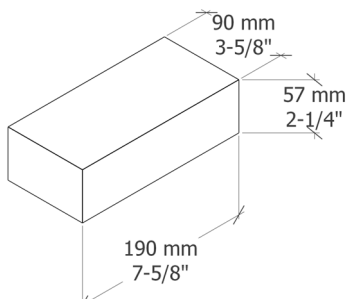
|  | PHYSICAL DATA     |                      |
|------------------------------------------------------------------------------------|-------------------|----------------------|
|                                                                                    | Code              | N/A                  |
|                                                                                    | Height            | 2-1/4"<br>57 mm      |
|                                                                                    | Pieces per Pallet | 720 full<br>360 half |
|                                                                                    | Percent Solid     | 100%                 |
|                                                                                    | Void              | N/A<br>N/A           |

## CHIMNEY BLOCK


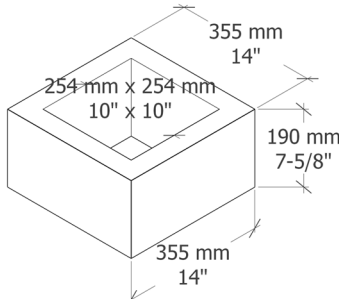
|  | PHYSICAL DATA     |                                               |
|-------------------------------------------------------------------------------------|-------------------|-----------------------------------------------|
|                                                                                     | Outer Dimension   | 14"<br>355 mm                                 |
|                                                                                     | Inner Dimension   | 10"<br>254 mm                                 |
|                                                                                     | Pieces per Pallet | 33                                            |
|                                                                                     | Percent Solid     | 57%                                           |
|                                                                                     | Void              | 0.44 ft <sup>3</sup><br>0.0125 m <sup>3</sup> |

### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA

[519-726-5444](tel:519-726-5444)

[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)




### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA


[519-944-7737](tel:519-944-7737)

[1-888-369-3449](tel:1-888-369-3449)


### STRETCHER



### BREAKER



### CORNER

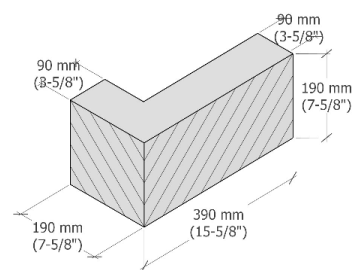


#### PHYSICAL DATA

| Code              | 4 inch<br>10 cm | 6 inch<br>15 cm       | 8 inch<br>20 cm       | 10 inch<br>25 cm      | 12 inch<br>30 cm      | L Return |
|-------------------|-----------------|-----------------------|-----------------------|-----------------------|-----------------------|----------|
| A-Dimension       | 3-5/8"          | 5-5/8"                | 7-5/8"                | 9-5/8"                | 11-5/8"               | 3-5/8"   |
|                   | 90 mm           | 140 mm                | 190 mm                | 240 mm                | 290 mm                | 90 mm    |
| Pieces per Pallet | 120             | 100                   | 75                    | 56                    | 53                    | 120      |
| Percent Solid     | 100%            | 64%                   | 59%                   | 56%                   | 53%                   | N/A      |
| Void              | N/A             | 0.14 ft <sup>3</sup>  | 0.22 ft <sup>3</sup>  | 0.29 ft <sup>3</sup>  | 0.38 ft <sup>3</sup>  | N/A      |
|                   | N/A             | 0.0040 m <sup>3</sup> | 0.0062 m <sup>3</sup> | 0.0082 m <sup>3</sup> | 0.0108 m <sup>3</sup> | N/A      |


#### PERFORMANCE DATA

|             |         |         |         |         |         |         |
|-------------|---------|---------|---------|---------|---------|---------|
| Unit Weight | 33.0 lb | 32.3 lb | 41.3 lb | 48.9 lb | 56.2 lb | 33.0 lb |
|             | 15.0 kg | 14.7 kg | 18.8 kg | 22.2 kg | 25.5 kg | 15.0 kg |
| Fire Rating | 1.5 hr  | 1.4 hr  | 2.2 hr  | 3.0 hr  | 3.4 hr  | 1.5 hr  |
| STC         | 43      | 46      | 50      | 51      | 53      | 43      |
| R-Value     | 1.73    | 1.95    | 2.09    | 2.15    | 2.20    | 1.73    |
| U-Rating    | 0.577   | 0.514   | 0.478   | 0.464   | 0.455   | 0.577   |


### STYLES




SPLITFACE




SPLIT RIB 2




SPLIT RIB 3




SPLIT RIB 4




SPLIT RIB 6




STRETCHER COLOURED




PROFILE



1-SCORE



LEDGE



PRESTIGE

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Heavyweight—Class "A"            | Compressive Strength: 15 MPa          |
| Density: 2000+ kg/m <sup>3</sup> | Absorption: 175 kg/m <sup>3</sup> max |
| Availability: Special Order      |                                       |

#### Head Office

7885 Howard Avenue  
Amherstburg, ON, CA  
[519-726-5444](tel:519-726-5444)  
[1-800-771-0658](tel:1-800-771-0658)

[santerrastonecraft.com](http://santerrastonecraft.com)



#### Retail Design Centre

5115 Rhodes Drive  
Windsor, ON, CA  
[519-944-7737](tel:519-944-7737)  
[1-888-369-3449](tel:1-888-369-3449)



