




STRETCHER



BREAKER



CORNER

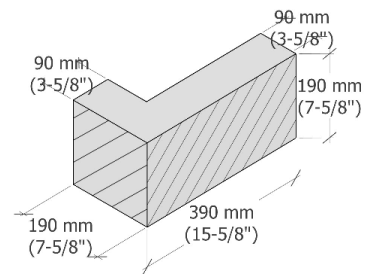


PHYSICAL DATA

Code	4 inch 10 cm	6 inch 15 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm	L Return
A-Dimension	3-5/8"	5-5/8"	7-5/8"	9-5/8"	11-5/8"	3-5/8"
	90 mm	140 mm	190 mm	240 mm	290 mm	90 mm
Pieces per Pallet	120	100	75	56	53	120
Percent Solid	100%	64%	59%	56%	53%	N/A
Void	N/A	0.14 ft ³	0.22 ft ³	0.29 ft ³	0.38 ft ³	N/A
	N/A	0.0040 m ³	0.0062 m ³	0.0082 m ³	0.0108 m ³	N/A


PERFORMANCE DATA

Unit Weight	33.0 lb	32.3 lb	41.3 lb	48.9 lb	56.2 lb	33.0 lb
	15.0 kg	14.7 kg	18.8 kg	22.2 kg	25.5 kg	15.0 kg
Fire Rating	1.5 hr	1.4 hr	2.2 hr	3.0 hr	3.4 hr	1.5 hr
STC	43	46	50	51	53	43
R-Value	1.73	1.95	2.09	2.15	2.20	1.73
U-Rating	0.577	0.514	0.478	0.464	0.455	0.577


STYLES




1-SCORE




SPLITFACE




SPLIT RIB 2




SPLIT RIB 3




SPLIT RIB 4




SPLIT RIB 6




STRETCHER COLOURED



PRESTIGE
(GROUND FACE)



SPLIT LEDGE



SMOOTH LEDGE

Heavyweight—Class "A"	Compressive Strength: 15 MPa
Density: 2000+ kg/m ³	Absorption: 175 kg/m ³ max
Availability: Special Order	

Head Office

7885 Howard Avenue
Amherstburg, ON, CA
[519-726-5444](tel:519-726-5444)
[1-800-771-0658](tel:1-800-771-0658)

santerrastonecraft.com



Retail Design Centre

5115 Rhodes Drive
Windsor, ON, CA
[519-944-7737](tel:519-944-7737)
[1-888-369-3449](tel:1-888-369-3449)