




STRETCHER



BREAKER




CORNER

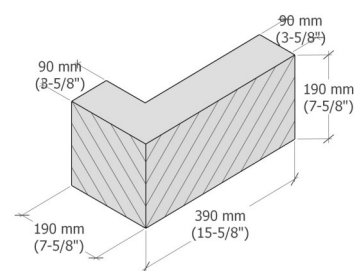


PHYSICAL DATA						
Code	4 inch 10 cm	6 inch 15 cm	8 inch 20 cm	10 inch 25 cm	12 inch 30 cm	L Return
A-Dimension	3-5/8"	5-5/8"	7-5/8"	9-5/8"	11-5/8"	3-5/8"
Pieces per Pallet	90 mm	140 mm	190 mm	240 mm	290 mm	90 mm
Percent Solid	120	100	75	56	53	120
Void	100%	64%	59%	56%	53%	N/A
	N/A	0.14 ft ³	0.22 ft ³	0.29 ft ³	0.38 ft ³	N/A
	N/A	0.0040 m ³	0.0062 m ³	0.0082 m ³	0.0108 m ³	N/A
PERFORMANCE DATA						
Unit Weight	33.0 lb 15.0 kg	32.3 lb 14.7 kg	41.3 lb 18.8 kg	48.9 lb 22.2 kg	56.2 lb 25.5 kg	33.0 lb 15.0 kg
Fire Rating	1.5 hr	1.4 hr	2.2 hr	3.0 hr	3.4 hr	1.5 hr
STC	43	46	50	51	53	43
R-Value	1.73	1.95	2.09	2.15	2.20	1.73
U-Rating	0.577	0.514	0.478	0.464	0.455	0.577


STYLES




SPLITFACE




SPLIT RIB 2




SPLIT RIB 3




SPLIT RIB 4




SPLIT RIB 6




STRETCHER COLOURED




PROFILE



1-SCORE



LEDGE
(SMOOTH OR SPLIT)



PRESTIGE
(GROUND FACE)

Heavyweight—Class "A"	Compressive Strength: 15 MPa
Density: 2000+ kg/m ³	Absorption: 175 kg/m ³ max
Availability: Special Order	